

PASS OVER THE PAD BEFORE ENTERING THE PUBLIC ROAD.

BROKEN OR CRUSHED STONE (2") FOR ANTI-TRACKING PADS IS TO MEET THE GRADATION SHOWN IN THE TABLE BELOW.

GRADATION OF 2" STONE

CONSTRUCTION ENTRANCE

PERCENT PASSING

BY WEIGHT

100

75-100

50-70

0-25

MESH NUMBER OR

OPENING SIZE


4.00 IN.


2.50 IN.


2.00 IN.


1.25 IN.

1.00 IN.

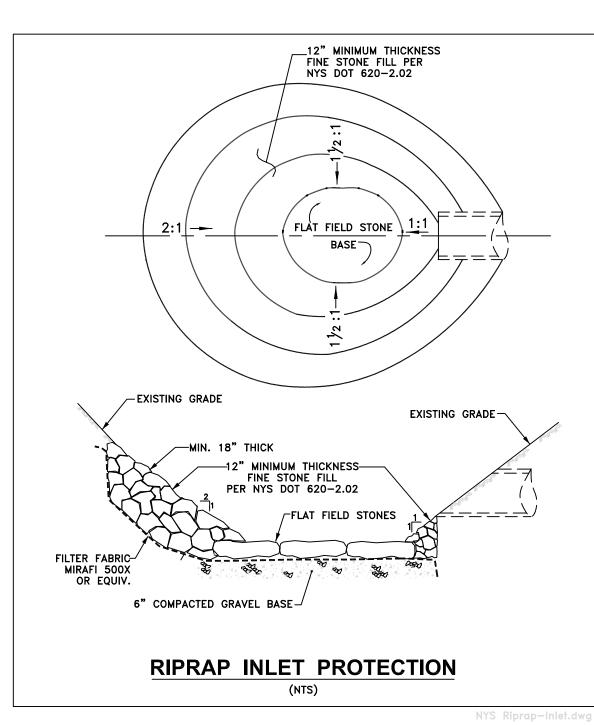


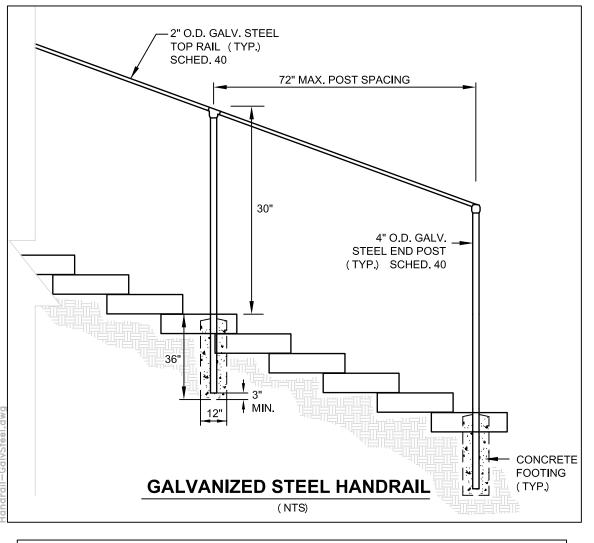


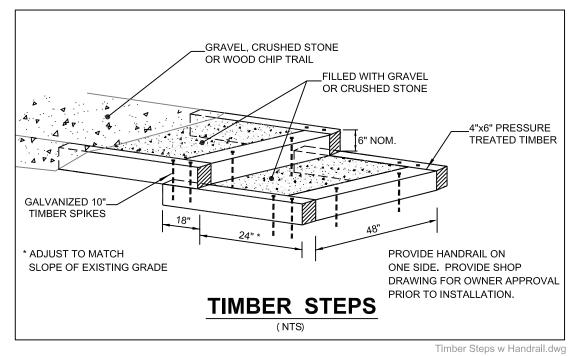


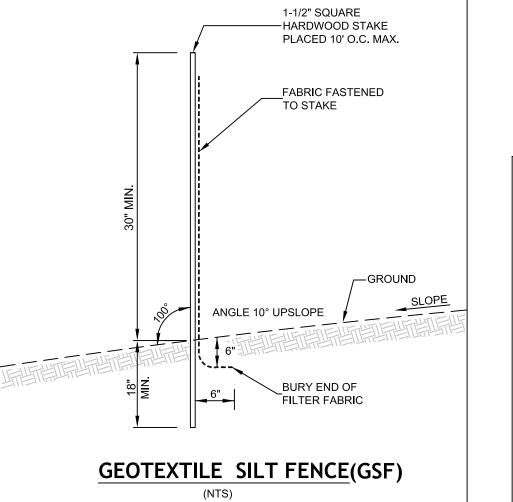


SiltFence GSF rev2-24-09.dwg

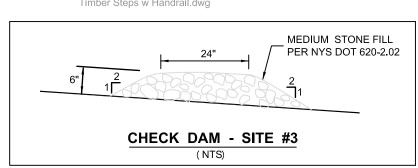

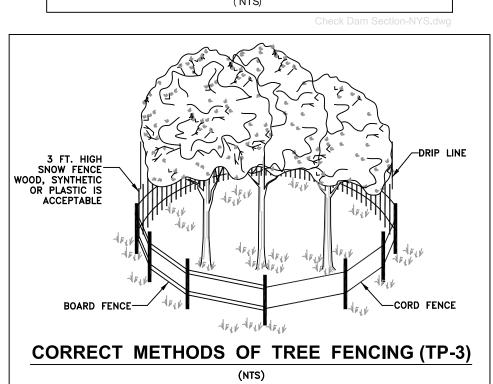

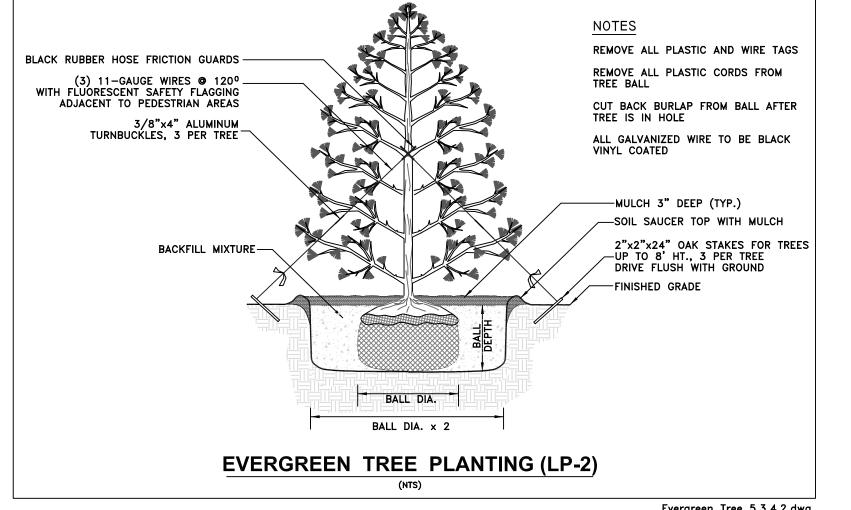

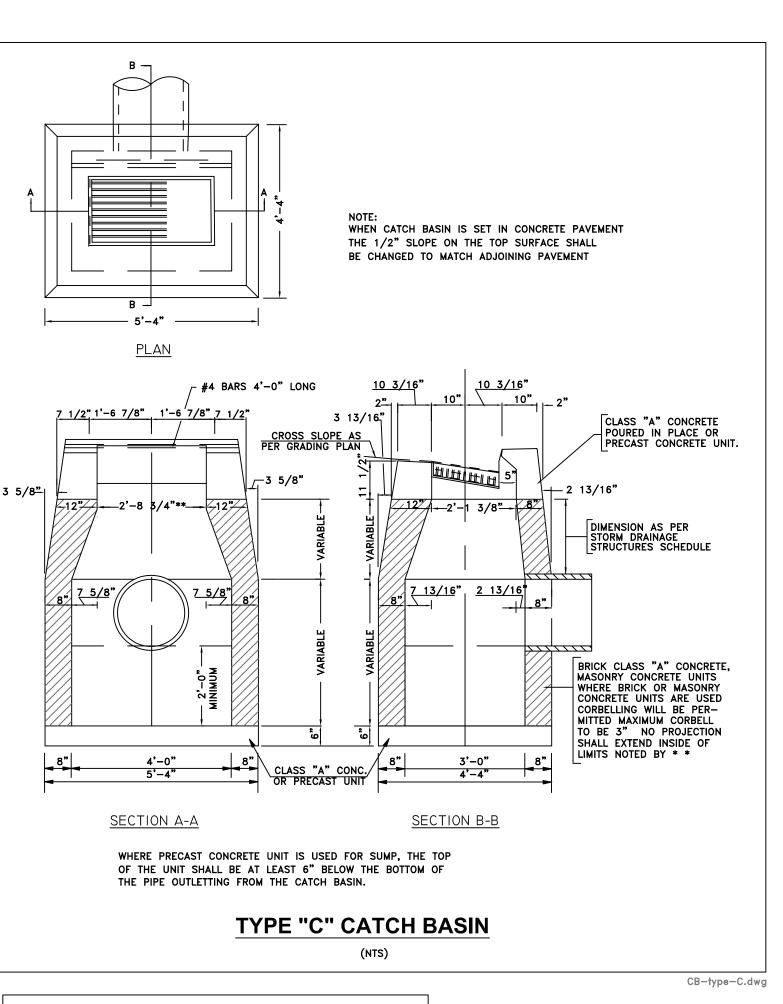

ADJUST TO GRADE WITH

UP TO FOUR COURSES

OF MASONRY OR PRECAST GRADE RINGS.

CB to MH conversion.dwg


STAGGER JOINTS


_ DRY-LAID BOULDER


WALL. BOULDERS


TO BE 8" MIN.


ANY DIMENSION.

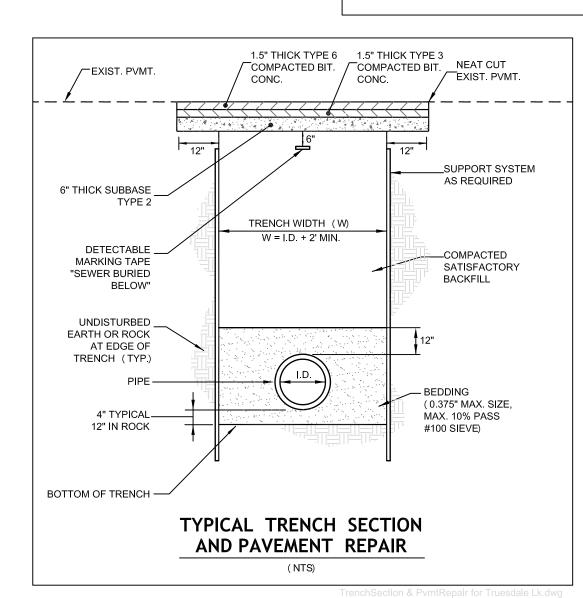

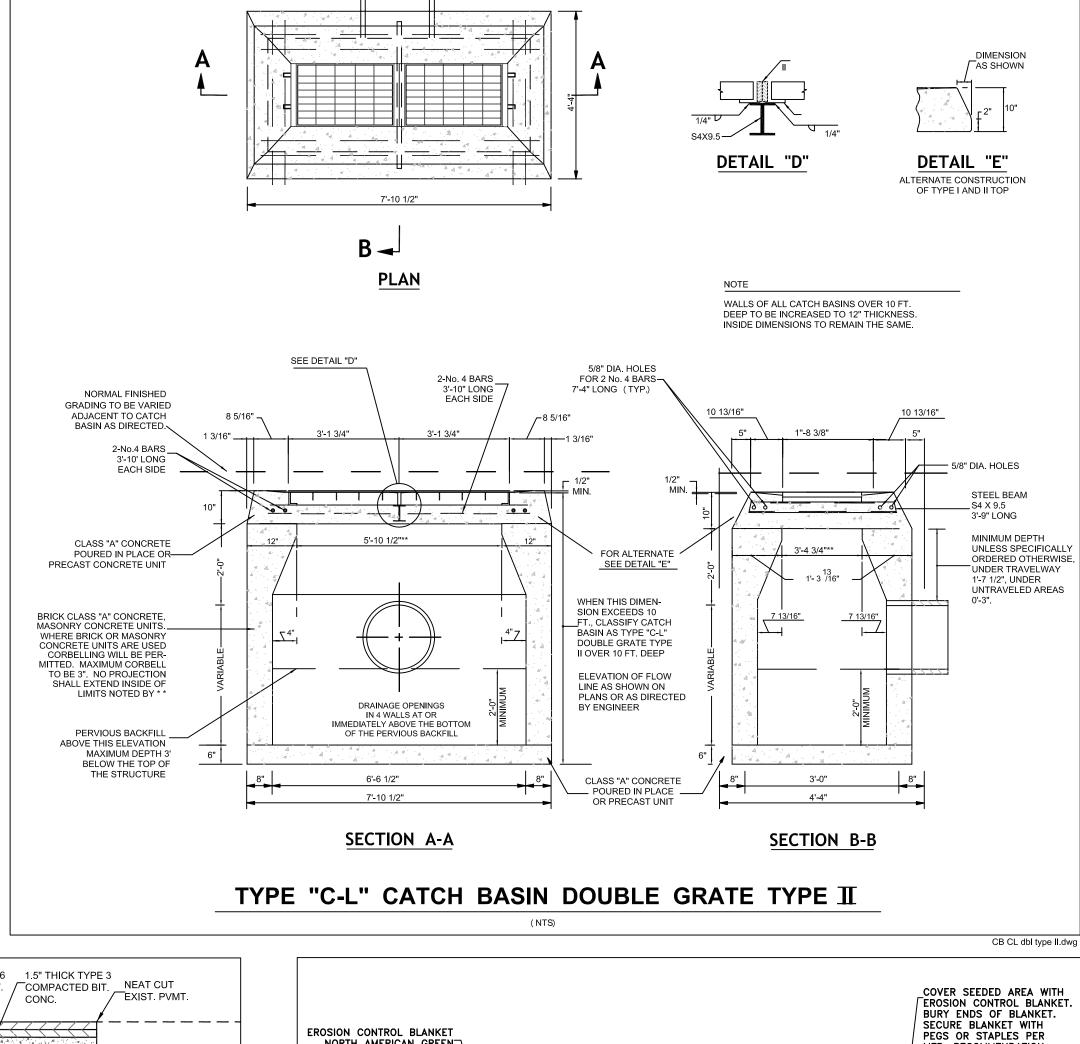

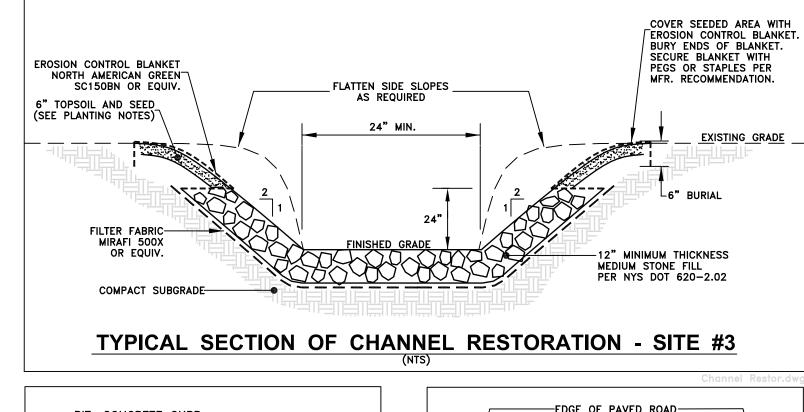

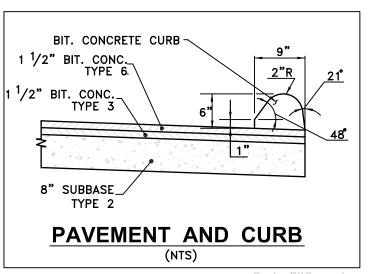

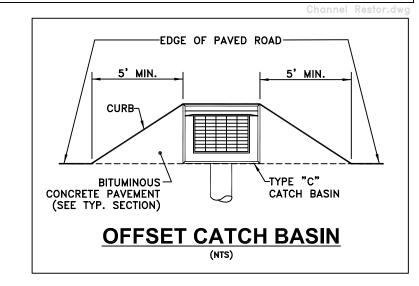

CLIENT REVIEW ONLY

NOT FOR CONSTRUCTION

TITLE:

REVISED 3/26/09: MISC. REVISED 7/10/08: MISC. REVISED 5/6/08: STORMWATER BMP, PARKING.

5/20/09 ISSUED FOR REVIEW



WESTPORT, CT 06880

PHONE: (203) 454-2110

FAX: (203) 454-4971

PREPARED FOR: PROJECT LOCATION: TRUESDALE LAKE SOUTH SALEM, NY ASSOCIATION

DETAILS

DATE: 1/8/07 DWG. NO.: **05-4295-02** SHEET 2 OF 3 SCALE: NONE

Tree Fencing 5.1.3.dwg

DUCTILE IRON FRAME

CONVERT CATCH BASIN TO MANHOLE

BOULDER WALL

REINFORCED

CONCRETE SLAB HS-20 LOADING

Evergreen Tree 5.3.4.2.dwg